


# VpCI<sup>®</sup>-426 / VpCI<sup>®</sup>-426 Powder

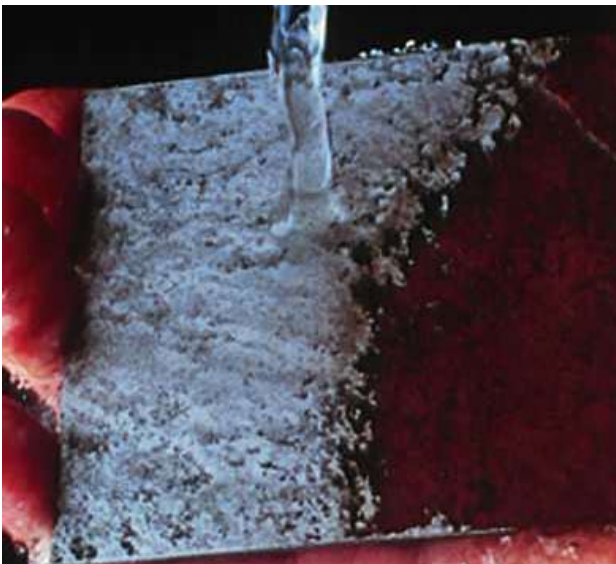

## PRODUCT DESCRIPTION

VpCI-426 is a water-based heavy duty concentrate designed to remove corrosion, scale, and naturally occurring oxides from iron, carbon and stainless steel, copper, aluminum, magnesium, and their alloys.

VpCI-426 not only removes corrosion and scale, but also brightens aluminum and copper. So safe, VpCI-426 can be used for household tasks.

## TYPICAL USES/FEATURES

- Rust remover for ferrous metals
- Preparation of aluminum surfaces before anodizing, painting, and electroplating
- Oxide removal of brass, bronze, copper, zinc, magnesium, and magnesium alloys
- Brightener for aluminum and copper
- Scale build-up remover from bathroom tubs, showers, and pipes
- Household corrosion removal needs
- NSN 6850-01-477-4155

## ADVANTAGES

- Very effective on a variety of metals to dissolve rust, scale, and oxide deposits
- Reduced costs of surface preparation
- Increased performance over equivalent products
- Used in areas that can not be sandblasted or cleaned with power tools
- User friendly, non-toxic, and nitrite-free
- Safe to use for household tasks
- Available in the powder form (VpCI-426 powder)

## APPLICATION VpCI-426 liquid (examples)

Steel\*:

Use 1 part of VpCI-426 to 4 parts water.

Copper:

Use concentrate or 1:1 dilution with water.

Aluminum:

### Heavy cleaning

Apply concentrate at room temperature or 1 part VpCI-426 to 1 part water at elevated temperature (120°F/49°C).

### Normal cleaning

Use 1 part VpCI-426 to 1 part water.

Magnesium and alloys:

Use 1 part VpCI-426 to 4 parts water at room temperature (cleans in approximately 1-2 minutes).

## APPLICATION VpCI-426 Powder

Use 7% (by weight) in water.

\*Once corrosion has been removed, it is advised to use Cortec VpCI<sup>®</sup>-414 (1:5 and 1:10 dilutions) to rinse away any residue and prevent the metal surface from flash rusting.

## TYPICAL PROPERTIES

### Liquid

Appearance Clear colorless liquid  
Density 8.9-9.1 lb/gal (1.07-1.09 kg/l)  
Non-volatile Content 20-26%

### Powder

Appearance Off-white/beige powder  
pH 2.5-3.5 (1% aqueous)  
Non-volatile content 95-100%

## PACKAGING AND STORAGE

VpCI-426 (liquid) is available in 5 gallon (19 liter) pails, 55 gallon (208 liter) drums, liquid totes, and bulk. VpCI-426 Powder is available in 5 lb (2.3 kg), 50 lb (23 kg), and 100 lb (45 kg) bags.

Minimum storage temperature: 32°F (0°C)  
Maximum storage temperature: 120°F (49°C)

## FOR INDUSTRIAL USE ONLY

**KEEP OUT OF REACH OF CHILDREN**

**KEEP CONTAINER TIGHTLY CLOSED**

**NOT FOR INTERNAL CONSUMPTION**

**CONSULT MATERIAL SAFETY DATA SHEET FOR MORE INFORMATION**

## LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.

BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



Distributed by:

4119 White Bear Parkway, St. Paul, MN 55110 USA  
Phone (651) 429-1100, Fax (651) 429-1122  
Toll Free (800) 4-CORTEC, E-mail [info@cortecvci.com](mailto:info@cortecvci.com)  
Internet <http://www.CortecVCI.com>

printed on recycled paper  100% post consumer  
Revised 8/25/09. Cortec Corporation 2000-2009. All rights reserved. Supersedes: 8/16/07.  
Cortec® is a trademark of Cortec Corporation  
© 2009, Cortec Corporation. All Rights Reserved. Copying of these materials in any form without the written authorization of Cortec Corporation is strictly prohibited.

Packnet Ltd.  
952-944-9124  
2950 Lexington Ave. S  
Suite 500  
Eagan MN 55121  
[www.packnetltd.com](http://www.packnetltd.com)